

Brief instructions for use

Models 3082, 3082 K from year of construction 06/2009

VÖLKER


A. Side rails

Raising the side rails


1. Pull the side rail element out horizontally until the end stop, and fold it upwards.
2. To adjust the height of the side rail, pull the telescopic section upwards until it reaches its end stop.

Lowering the side rails

1. Press both buttons on the outside of the frame (fig. 1), just under the cross-member, to bring the height-adjustable rail element to its lowest position.
2. Press the „Drücken / Push“ trigger at the lower edge of the side rail element (fig. 2) and tilt it sideways into the horizontal plane, so that it lies parallel to the floor.
3. Push the rail element completely underneath the lying surface (fig. 3a, fig. 3b).

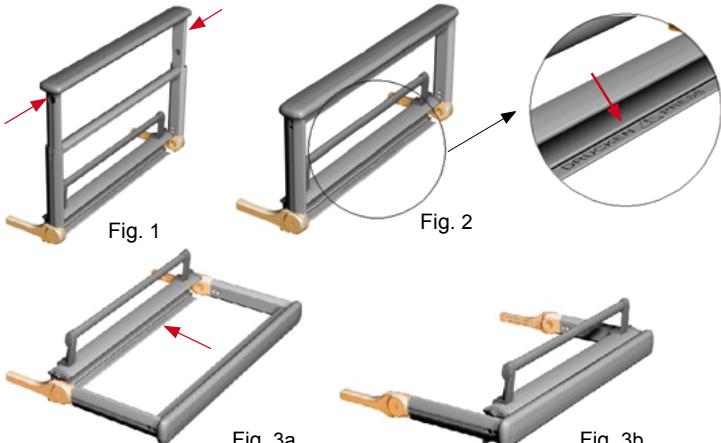

B. Hand control

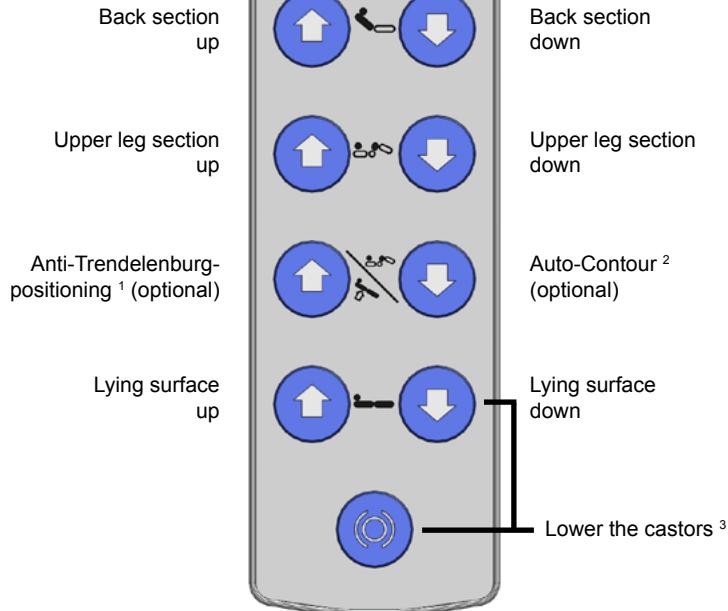

¹ Head end raised

² Back and upper leg section raised simultaneously

³ Press both buttons simultaneously: the lying surface moves to the lowest position and the castors lower



Völker GmbH • Wullenfeld 79 • 58454 Witten/Germany

Telephone +49 2302 960 96-0 • Fax +49 2302 960 96-16 • www.voelker.de • info@voelker.de

KA106 Rev. 2 (03.2018)

Brief instructions for use

Models 3082, 3082 K from year of construction 06/2009

VÖLKER

C. Hand control key lock

Activating the hand control key lock disables all of the functions of the hand control.




Hand control
locked



Hand control
unlocked

Der Handschalter kann auch durch die Taste „Handschatler sperren“ (9) an der Personaltastatur gesperrt werden.

D. Nurse keypad with individual lock (option)

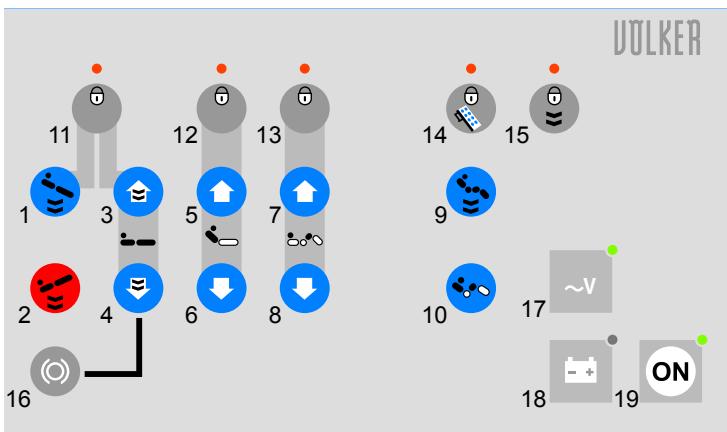

- 1 Anti-Trendelenburg positioning ^{1, 8}
- 2 Trendelenburg positioning ^{2, 8}
- 3 Lying surface up ⁸
- 4 Lying surface down ⁸
- 5 Back section up
- 6 Back section down
- 7 Upper leg section up
- 8 Upper leg section down
- 9 Cardiac chair position ⁸
- 10 Auto-Contour ³
- 11 Lock lying surface lift and anti-Trendelenburg positioning
- 12 Lock back section
- 13 Lock upper leg section
- 14 Lock hand control
- 15 Lock automatic function
- 16 Lower the castors ⁴
- 17 Mains voltage display ⁵
- 18 Battery display ⁶
- 19 On switch ⁷

¹ Head end raised

² Head end lowered

³ Back and upper leg section raised simultaneously

⁴ Press both buttons simultaneously: the lying surface moves to the lowest position and the castors lower

⁵ green: mains voltage is on

⁶ green: >80% charged; yellow: 30-80% charged; red: discharged; flashing: charging

⁷ after pressing the button, the keypad is available for up to 120 sec. after the last action, then it locks automatically

⁸ automatic function with double click possible on a country-by-country basis

NOTE Please note that to operate the bed, the nurse keypad must be switched on by pressing the on switch. If no electric function can be activated, press the green reset button on the motor housing. If the battery display then lights up red, briefly disconnect the mains plug. Press the green button on the mains isolation switch after reconnecting the mains plug to put the bed back into operation. Never press both green buttons at the same time.

NOTE The bed is not suitable for cleaning in automatic washing systems (IPX4).

NOTE Please observe the notes in the detailed instructions for use!



Vöcker GmbH • Wullenfeld 79 • 58454 Witten/Germany

Telephone +49 2302 960 96-0 • Fax +49 2302 960 96-16 • www.voelker.de • info@voelker.de

KA106 Rev. 2 (03.2018)